

---

# AndroidMobileUeserNewManual

---

## 1.Contents

2.Introduction.....	1
3. GettingStart .....	2
4.Add / Edit / Delete Device.....	2
Add Device.....	2
Edit/Delete Device .....	5
5.DeviceManagement .....	7
6.LiveView .....	8
Panel button description .....	9
PTZControl .....	10
7.SnapshotandRecord files.....	10
SnapshotandRecordPlayback .....	10
snapshotsand videos deleted.....	11
8.Help and Feedback.....	14
Help.....	14
Feedback .....	15
Version .....	16

---

# 1.Introduction

This manual describes how to set up and use android (android pad client) version of the video surveillance software.

android version of the video surveillance software allows users to view, control remote IPC, DVR real-time video, manage IPCamera (IP cameras) and DVR (DVR) online video streaming. Features include:

1 watch

streaming video over 3G or WIFI network 2, support

multi-window video playback (maximum

achievable 4 viewing)

3, enabling users to add editing equipment

4, support for capture and

video capture Browse 5, support

for video recording and viewing video 6, support

for video search

7, support PTZ control

8, support for two-

dimensional code scanning equipment added

9, adding support for LAN devices 10,

support manual input devices

11, support system settings and device management 12,

support two-way voice intercom


---

Our software allows customers under normal network environment for remote real-time mobile video surveillance, to maximize the protection of property security customers.

## 2. Getting Start

1, make sure the camera is connected to a network connection


2, the Android device is connected to the corresponding 3G/WIFI network, run the application, enter the main interface. As shown:

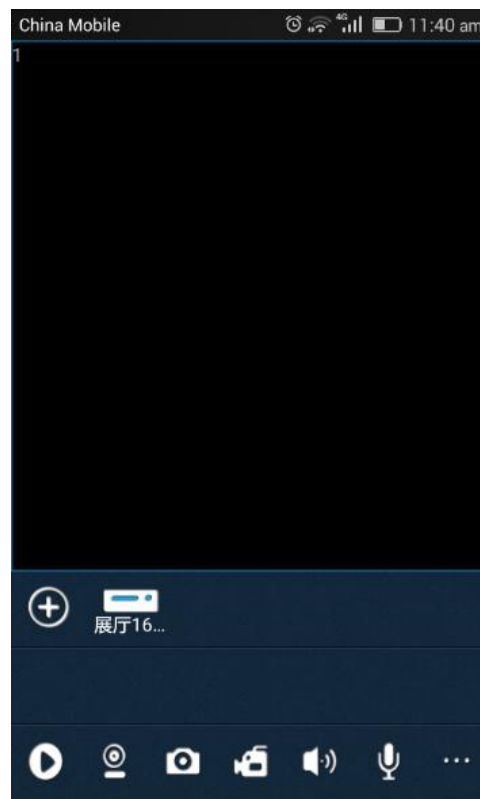

## 3. Add /Edit/Delete Device

### Add Device

Click the icon  to pop-up "option to add the type" box. As shown:

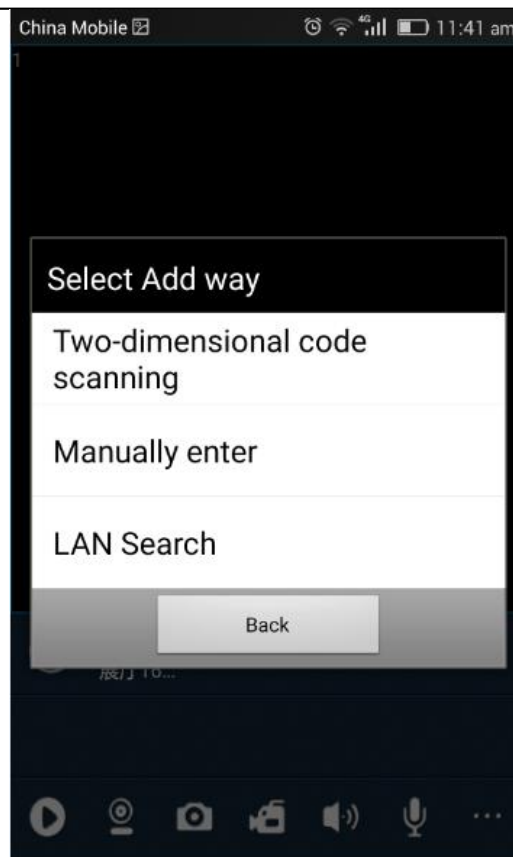



Button Options	Descriptions
Two-dimensional code scanning	Scan the QR code on your device to fill in the UID string,
Manually enter	Fill in the login info manually,
Lan search	If your DVRs are on the same local network with your phone, client would find them and let you add those devices easily




All of the 3 adding methods above will lead you into the Device edit panel:

**UIDType:** the default type of adding device, using the device UID together with the connecting info from the client server, with this type, you can free yourselves from the boring job of setting port forwarding and the IP address.




**IPType:** in case your device does not have the UID or fails to use the UID to connect, you could choose the **Manual** type to add device, then tap the **UIDType** **IPType** to assign the IP and port/username... to the app, just ignore the Entry of the UIDType.

	Entry	Descriptions
UIDType	Name	Any characters that you like to identify this device. Please be noted that the names should not duplicate with existing device's name.
	UID	The device UID, (if you are using the QR Code Scan/Local Search method to add device, this item will be filled automatically)
	User	DVR's username
	Password	DVR's password
	Alarm	Enable the Alarm Push function (it could work if your DVR support the Alarm Push function)
	Channel Number	Select the channel number, when assign  , the app will set the number automatically.
IPType	Name	Any characters that you like to identify this device. Please be noted that the names should not duplicate with existing device's name.
	Address	Target's IP address or URL, please be noted that if URL is used, the "http://" prefix should not be included.
	Port	DVR's cellPhone port (or call mobile Port)
	User	DVR's username
	Password	DVR's password
	Alarm	Enable the Alarm Push function (it could work if your DVR support the Alarm Push function)
	Channel Number	Select the channel number, when assign  , the app will set the number

### Edit/Delete Device

To Edit/Delete a device, tap to spread out the buttons. Then tap  to open the Device list, you can enter into editing mode by tapping  of a certain row and click  button in the upper-right corner.


You can modify device login information in this view. And at the bottom of this view, you can delete the device by clicking the red button.

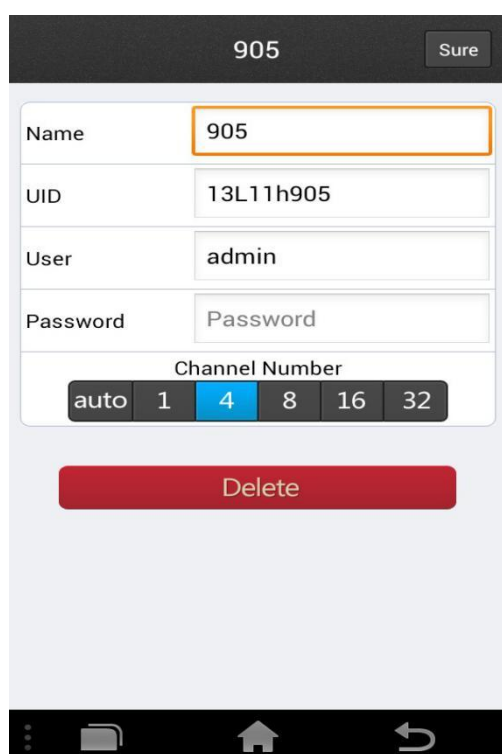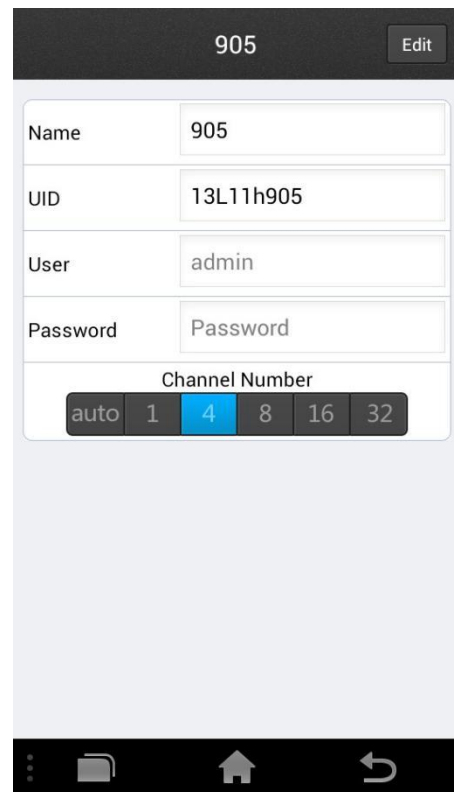
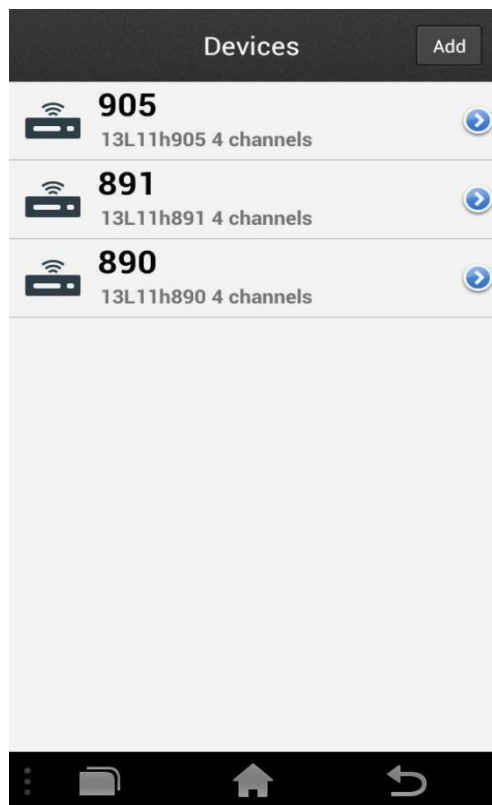




---

## 4. Device Management

Click  to enter the device management page. This page can view the remote video information and also modify the contents inside information.

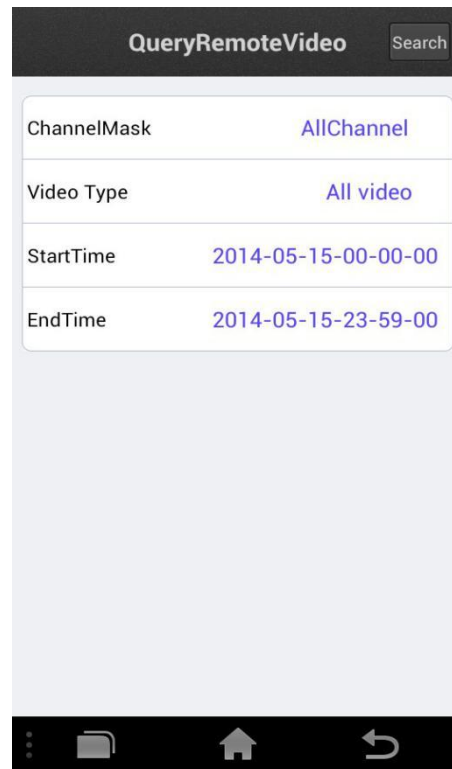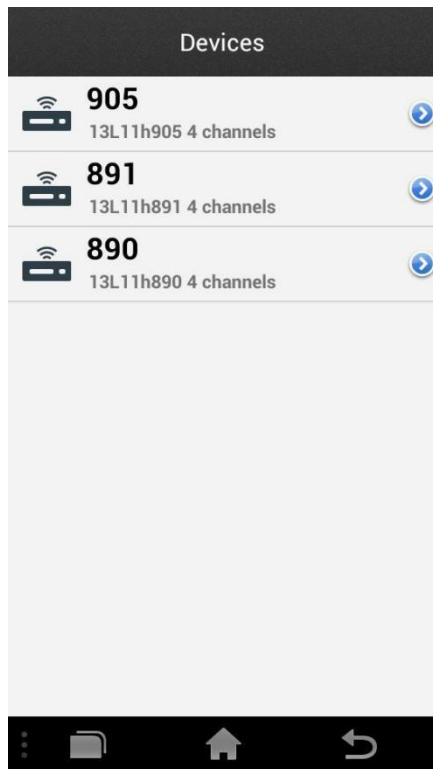


---

## 5.LiveView





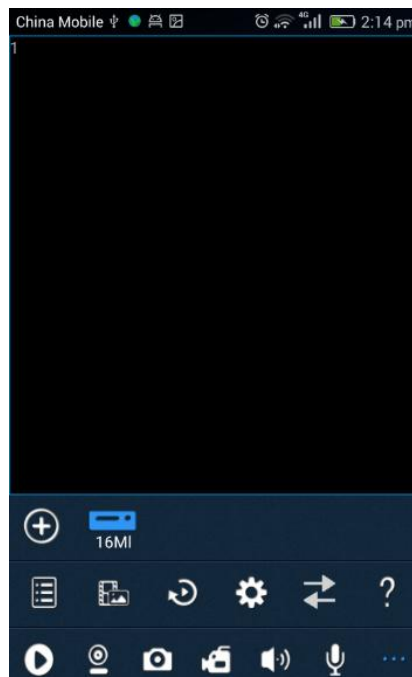















When finish adding device, it will show under the playing windows. To start a live video, tap the Device icon to check out the channels, then tap the channel you want. Repeat above steps to connect to other channels of the device or another device.

When someone channel selected, the channel circle icon's color will turn into bright-Blue. Tap the bright-Blue icon, the channel video will stop and the channel circle icon color becomes grey.




**Tip:** You can tap and drag the window around to swap any two of them except that dragging the large window makes no swapping.

## Panelbuttondescription

ButtonIcon	ButtonFunction
	Add anew device
	 PTZ:UP
	 PTZ:Down
	 PTZ:Left
	 PTZ:Right
	 ZoomIn
	 Zoom Out
	 FocusAdd
	 Focus Minus
	 IrisAdd
	Iris Minus
	Snapshot
	Start/StopRecord
	Audio
	Talkback
	DeviceLis
	SnapshotandRecordfiles
	RemoteRecordfileSearchandplayback
	LocalSettings

---


## PTZControl



Tap  to open the PTZ Control panel. Slide to show more PTZ control buttons; to hide the panel, you can either tap the button again or tap any video window.




## 6. Snapshot and Record files


### Snapshot and Record Playback


Click the icon  to open the management interface to capture pictures and video files. In the device named folder, you can click "Edit" on the corresponding folder for deletion, or you can open a folder as a single file to delete.

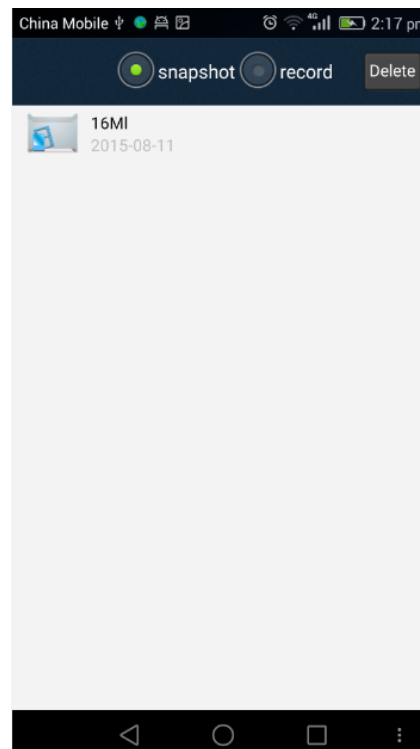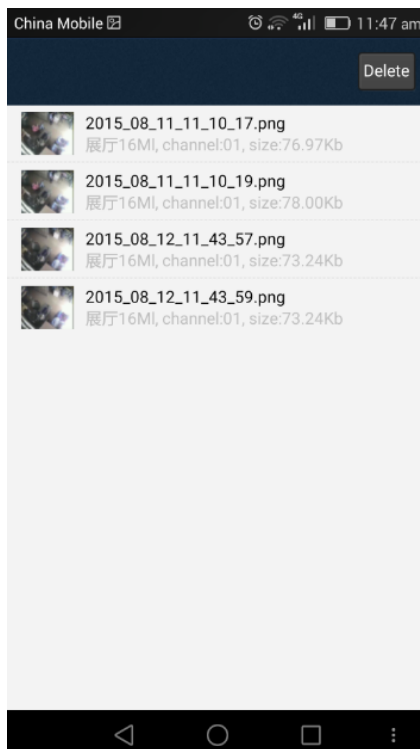

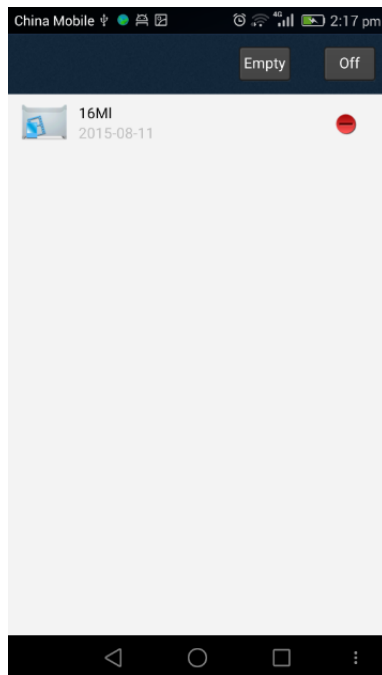


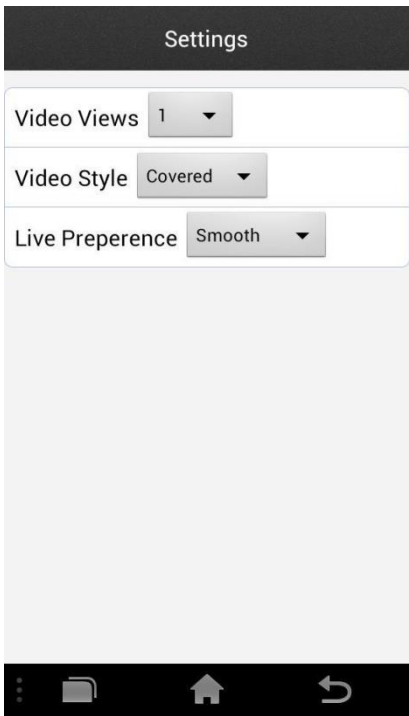
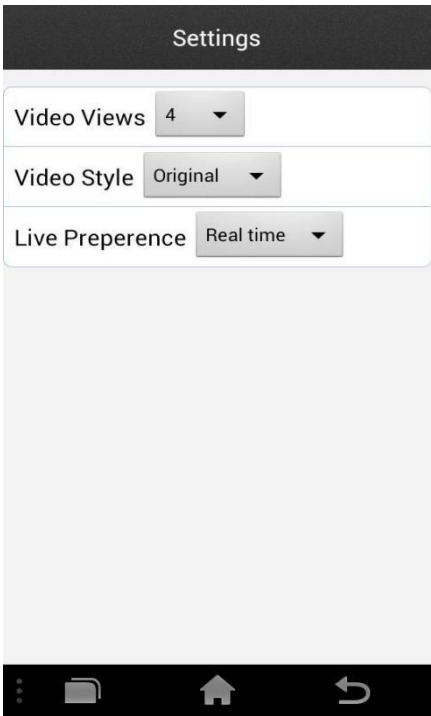
## snapshotsandvideosdeleted

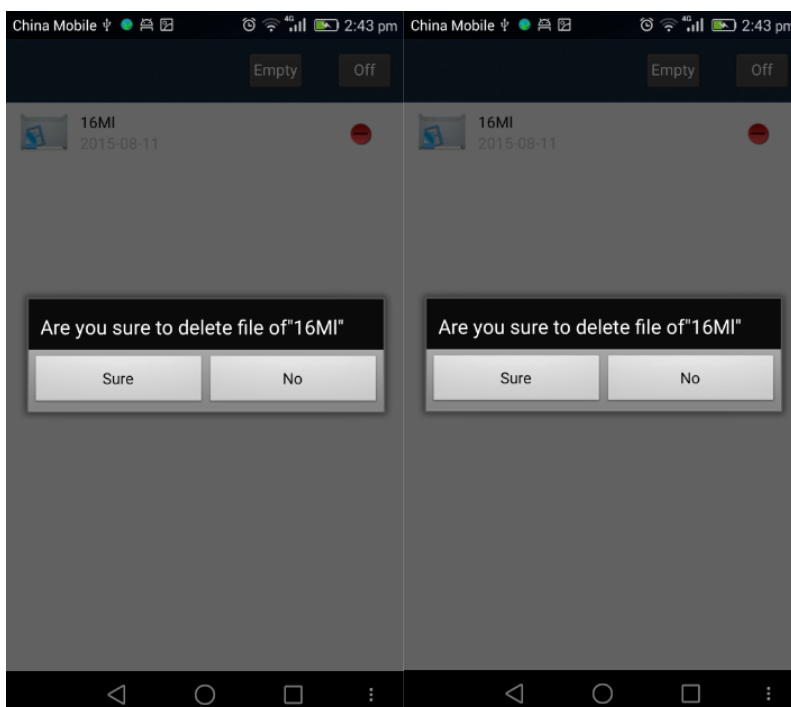




Click the "Delete" all the folders on the screen or behind file  has a symbol then click on the prompt dialog box will popup, you can empty the folder or file folder below, click OK then the corresponding folder or file is deleted, click cancel to stop the delete operation. Click Close to return to the snapshot, video pages.



# 7.localsettings

Clicktheicon  toenterthesettingspage:




VideoViews		Onewindow displayon theLive view
		Fourwindows displayontheLive view
Live Preference		Real-timemode:nobuffering,whichmeansthere is minimum delayofthevideodisplayandvideofluency maybe suffered;
		Quality mode: bufferingenabled,the videowill bemorefluent inthis mode;
Live Preference		Ifyourdeviceisonthesamelocalnetworkwithyouri Phone,stronglyrecommendingthe“Inhouse”Ty pe;clientwillprioritiesconnecttheDVRusingtheL ANnetworktogetmorefluentvideoandsaveyourNe tworkTraffic.IffailtoconnectwithLANnetwork, client will automatic turn toWAN connected

	<div>Original ▼</div>	<p>Choosing this type, client won't try to connect with LAN but immediately connect with WAN. choose this type to save the connecting time if you need to outside in majority of the time</p>
--	-----------------------	-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

---


## 8.Help andFeedback

Click to  go to for help and feedback interface

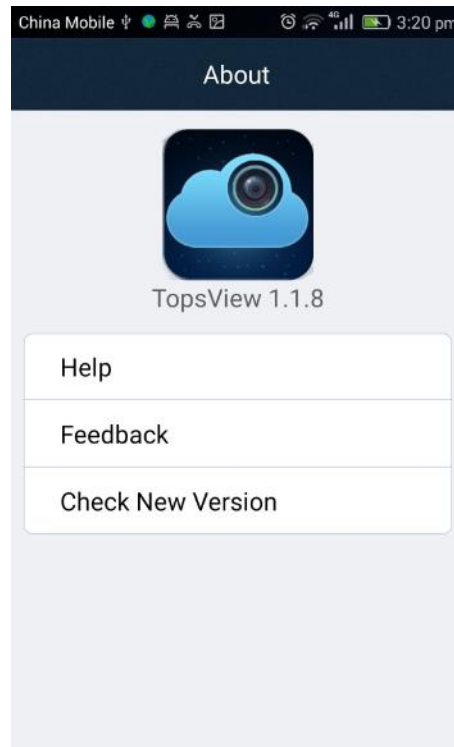

### Help

Click to enter the help screen. The interface icons and buttons are functional as described in the description. You can slide around to see.

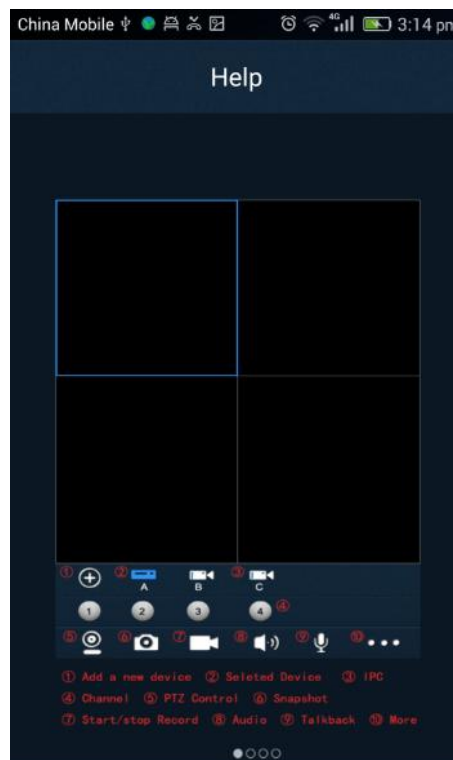




---

## Feedback

Click to enter feedback interface. Fill in your e-mail, select the type of feedback, the feedback from the detailed description, after the submission of our service to your mailbox can see the feedback.

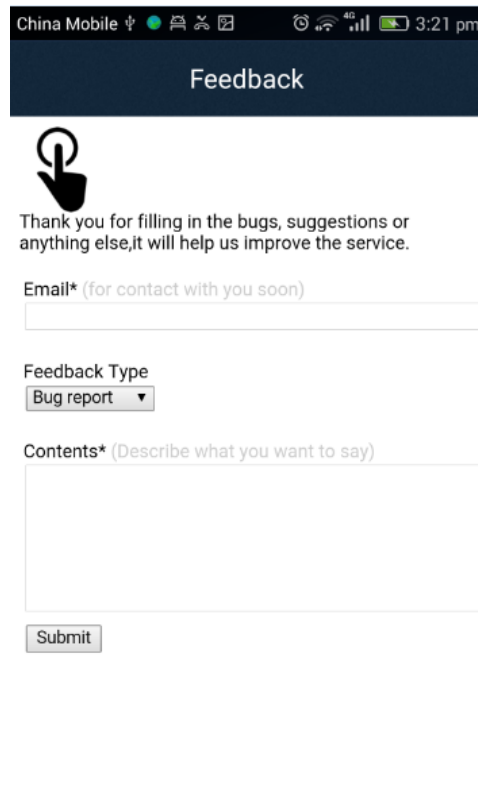

The screenshot shows a mobile application interface for submitting feedback. At the top, the status bar displays 'China Mobile' and various icons. Below it, a dark blue header bar contains the word 'Feedback' in white. The main content area has a white background. It starts with a circular icon containing a hand cursor, followed by the text: 'Thank you for filling in the bugs, suggestions or anything else, it will help us improve the service.' Below this is a text input field labeled 'Email\* (for contact with you soon)'. Next is a 'Feedback Type' section with a dropdown menu currently set to 'Bug report'. This is followed by a larger text input field labeled 'Contents\* (Describe what you want to say)'. At the bottom of the form is a 'Submit' button.

## 8.3 Version

The current version is the version number of the software used